


Výstužné zvarané siete

vyrobené z rebrovaných ocelí

DIN 488 (BST 500 M)

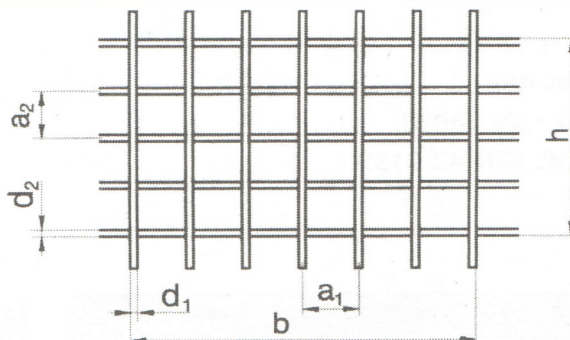

Typ	priemer drôtu		rozostup		šírka b (mm)	dĺžka h (mm)	teoretická hmotnosť	
	d ₁ (mm)	d ₂ (mm)	a ₁ (mm)	a ₂ (mm)			m ² (kg ⁻²)	kus (kg.ks ⁻¹)
Q 131	5,0	5,0	150	150	2150	5000	2,09	22,50
Q 188	6,0	6,0	150	150	2150	5000	3,01	32,40
Q 283	6,0	6,0	100	100	2200	5000	4,44	48,80
Q 335	8,0	8,0	150	150	2200	6000	5,32	70,20
Q 503	8,0	8,0	100	100	2200	6000	7,89	104,20
R 131	5,0	4,0	150	250	2150	5000	1,47	15,80
R 188	6,0	5,0	150	250	2150	5000	2,17	23,30
R 335	8,0	5,0	150	250	2200	6000	3,31	43,70
KA 16	4,0	4,0	100	100	2000	3000	1,98	11,80
KA 17	4,0	4,0	150	150	2000	3000	1,35	8,12
KA 18	4,0	4,0	200	200	2000	3000	0,98	5,90
KD 35	5,0	5,0	100	100	2000	3000	3,08	18,48
KD 37	5,0	5,0	150	150	2000	3000	2,11	12,63
KD 36	5,0	5,0	200	200	2000	3000	1,54	9,24
KH 30	6,0	6,0	100	100	2000	3000	4,44	26,64
KH 20	6,0	6,0	150	150	2000	3000	3,03	18,20
KH 31	6,0	6,0	200	200	2000	3000	2,23	13,40
KY 14	8,0	8,0	150	150	2400	6000	5,27	75,84
KY 49	8,0	8,0	100	100	2000	3000	7,90	47,40
KY 50	8,0	8,0	150	150	2000	3000	5,40	32,40
KY 51	8,0	8,0	200	200	2000	3000	4,00	24,00
KY 80	8,0	8,0	150	150	2150	5000	5,36	57,66
KY 81	8,0	8,0	100	100	2150	5000	7,99	85,91
AQ 50	5,0	5,0	100	100	2400	6000	3,08	44,36
AQ 60	6,0	6,0	100	100	2400	6000	4,44	63,94
AQ 70	7,0	7,0	100	100	2400	6000	6,04	87,00